

# SimplyDuo User Manual

Version 1.0.0.0

<b>Package Contains</b>	<b>3</b>
<b>Learn About Your Mouse Phone</b>	<b>4</b>
<i>Product Overview</i>	4
<i>Specifications</i>	4
<i>System Requirements</i>	5
<i>Mouse Phone Layout</i>	5
<i>Keypad</i>	6
<i>LCD Icons</i>	6
<b>Getting Started</b>	<b>7</b>
<i>Used as a Mouse and a Hi-Fi Speaker</i>	7
<i>Used as a VoIP phone</i>	7
Step 1: Install the Latest Skype Applications	7
Step 2: Install the Mouse Phone Driver	7
<b>Update the Mouse Phone Driver</b>	<b>9</b>
<b>The Call Functions</b>	<b>11</b>
<i>Make a VoIP call</i>	11
<i>Redial a VoIP call</i>	12
<i>Make a SkypeOut call</i>	12
<i>Receive a VoIP call</i>	12
<i>End a call</i>	12
<b>Other Functions</b>	<b>13</b>
<i>Select a Chord Music Ring Tone</i>	13
<i>Check Call History and Voice Mail</i>	13
<i>Adjust Volume for Speaker</i>	14
<b>FAQ</b>	<b>15</b>

## Package Contains

When you receive your Optical USB Mouse Phone, please check to make sure that your package contains the following items:

	One optical USB mouse phone
	One set of earphone
	One mini installation CD

**Note:**

This user manual is written for the SimplyDuo driver **version 1.0.0.0**.

# Learn About Your Mouse Phone

## Product Overview

With high quality USB audio feature, this optical USB Mouse Phone can also be used as a mini computer hi-fi speaker to play music. Moreover, when you flip the cover of the mouse, the fully functional keypad and the LCD screen inside can help you make/receive VoIP calls even easier. No doubt it is the best PC companion for you to surf the Internet and enjoy popular VoIP services.

### As a mouse:

- 1.5m USB cable (USB 1.1)
- 800 dpi optical sensor

### As a Hi-Fi Speaker:

- Crystal clear sound quality
- 48 KHz sampling rate
- Supplied earphone to protect your privacy.

### As a VoIP Phone:

- Auto detection between mouse and VoIP phone
- Seamlessly integrated with **Skype**
- Monochrome 128\*64 pixel LCD with backlight. Supports all kinds of languages
- Contact List, Call List, Call history, time, and caller ID display on LCD screen
- Hands-free speakerphone function
- Various chord music ring tones catering to different tastes.
- Fully functional keypad and LCD screen enables you to make/receive calls without using keyboard and mouse.
- Rings loudly on an incoming call.
- Acoustically isolated earpiece and microphone to eliminate echo.
- Full-duplex communication with crystal clear voice.


## Specifications

<b>Weight</b>	119g
<b>Dimensions</b>	99mm*50mm*29mm
<b>Cabling</b>	1.5M USB Cable (USB 1.1)
<b>LCD</b>	29mm*13.5mm; 128*64 Pixel
<b>Mouse Optical Sensor</b>	800 dpi
<b>Earphone Connector</b>	2.5mm
<b>Voltage</b>	4~5.25 V
<b>Operating Humidity</b>	5~95%RH
<b>Operating Temperature</b>	0~40°C

## System Requirements

- ✓ Microsoft Windows 2000/Windows 2003/Windows XP
- ✓ Pentium 400MHz above processor/128MB RAM/16MB free hard disk capacity.
- ✓ One USB port available.
- ✓ Internet connection (ADSL, Cable Modem, Dial-Up, Wireless LAN) for the VoIP Service.

## Mouse Phone Layout

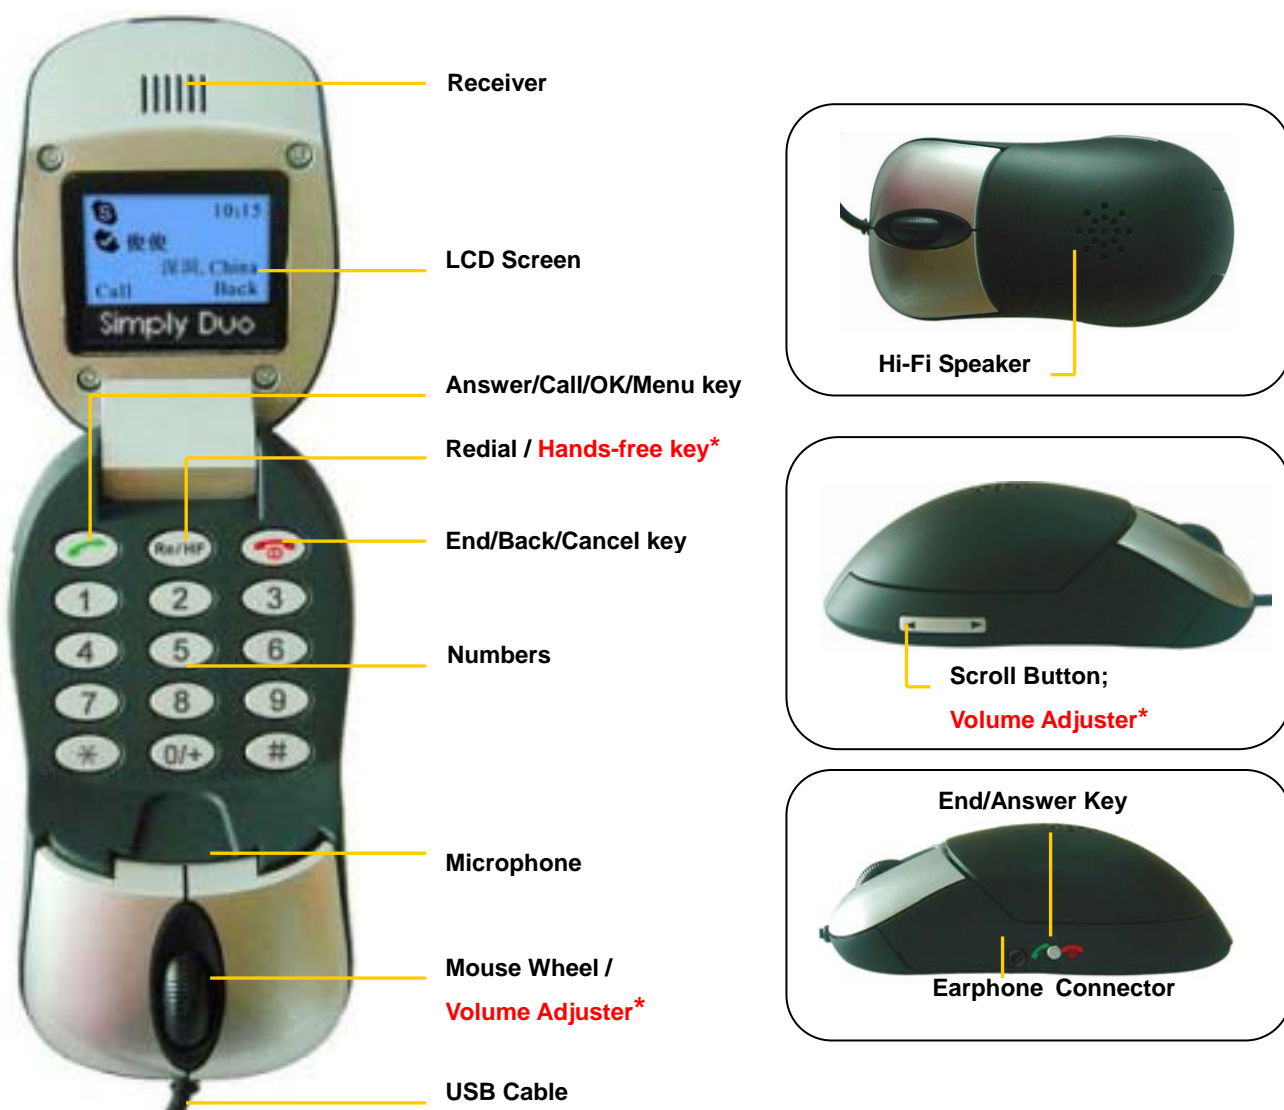






**Note:**














**Volume Adjuster\***: for detailed usages of Volume Adjusting when the mouse is closed or opened, please refer to "**Other Functions**" ---"Adjust Volume for Speaker" in this manual.

**Hands-free key\***: for detailed usages of the Hands-free key, please refer to "**FAQ**" Q4 in this manual.

## Keypad

Key	Instructions
	Answer/Make a VoIP call; OK; enter the menu for History Call / Activate VoIP / Volume Setting.
	End/Cancel a VoIP call; back to previous option.
	Redial a VoIP call on standby mode; enter into hands-free mode during a call
	Answer/End a VoIP call; activate/hide Skype window
	Scroll up/down a list; adjust volume for the speaker.

## LCD Icons

Icons	Instructions	Icons	Instructions
	Skype Contact		Away status
	Online status		Offline status
	Unavailable status		Not sharing contact details
	Incoming call		The call has been connected
	Outgoing call		The call has been disconnected
	Missed call	HF	You are ready to close your phone and use the hands-free function
	Voice mail		Volume status

# Getting Started

## Used as a Mouse and a Hi-Fi Speaker

Plug the Mouse Phone into the USB port of your PC and you can use it as a mouse and a Hi-Fi speaker now.

## Used as a VoIP phone

To use it as a VoIP phone, you need to install some needed software as shown below:

### Step 1: Install the Latest Skype Applications


The latest version of Skype (Version 3.0 or above) is strongly recommended. You can download it from Skype's official website:

<http://www.skype.com/download/skype/windows/>


### Step 2: Install the Mouse Phone Driver




You can insert the supplied installation CD into your PC, and run SimplyDuoSetup.exe.

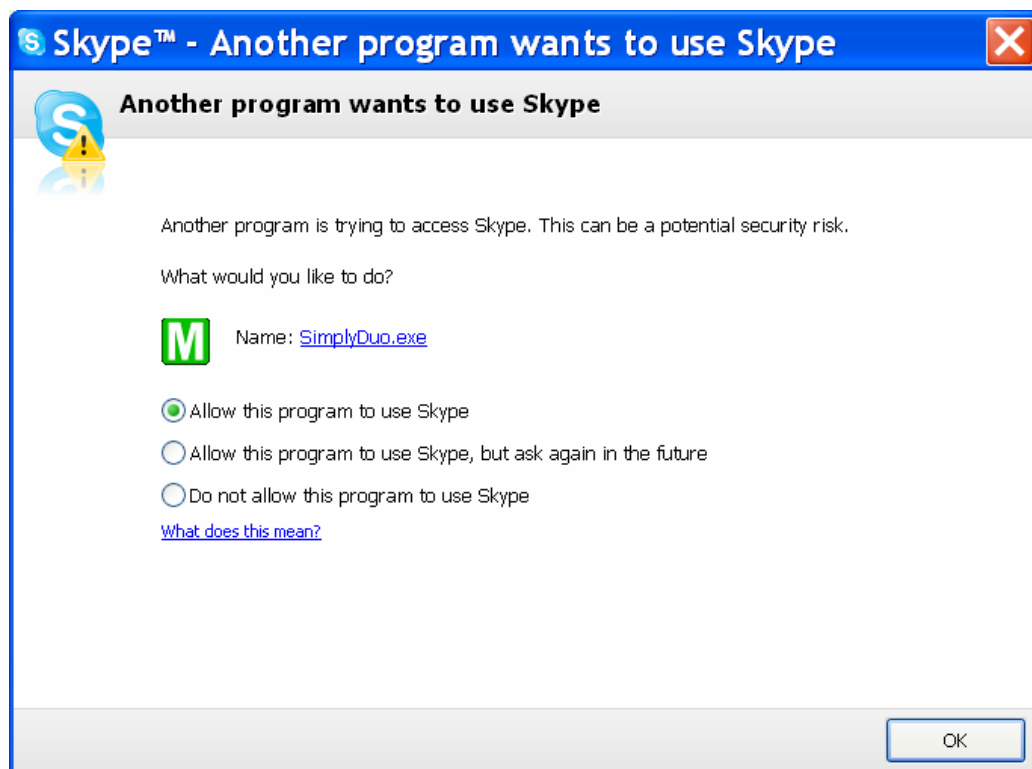When the Mouse phone driver runs for the first time, Skype will pop up the following window. Please select "Allow this program to use Skype" as the illustration shown below:

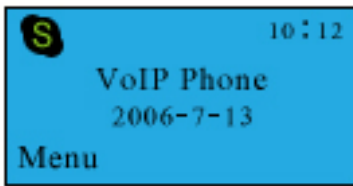


Now, the LCD screen will be shown as below and you can see a green icon **M** in the task bar which indicates you are ready to make/receive calls with the Mouse phone.



Driver Icons	Indications
 (Green)	The mouse works normally.
 (Grey)	The mouse fails to communicate with VoIP applications. (Please refer to " <b>FAQ</b> " Q1 in this manual)
 (Red)	The mouse fails to communicate with your computer. (Please refer to " <b>FAQ</b> " Q2 in this manual.)

## Update the Mouse Phone Driver


Please remember to update the Mouse Phone driver regularly. You can follow this guideline here:

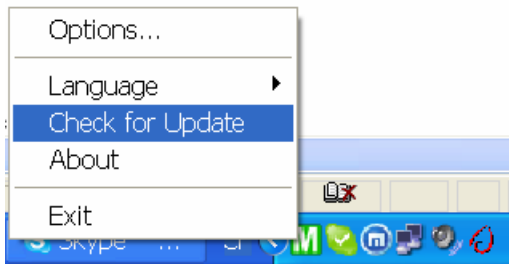


Right click the icon **M** and choose **“Check for Update”**.

Or you can enable your driver to check for update automatically in the driver's panel as follows:

- ① Right click the icon **M**, and choose **“Options”**.

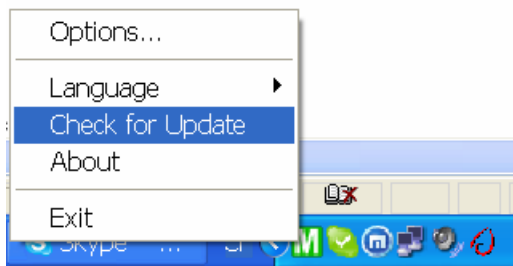

- ② Go to **“General”** panel and check before **“Check for update automatically”**.

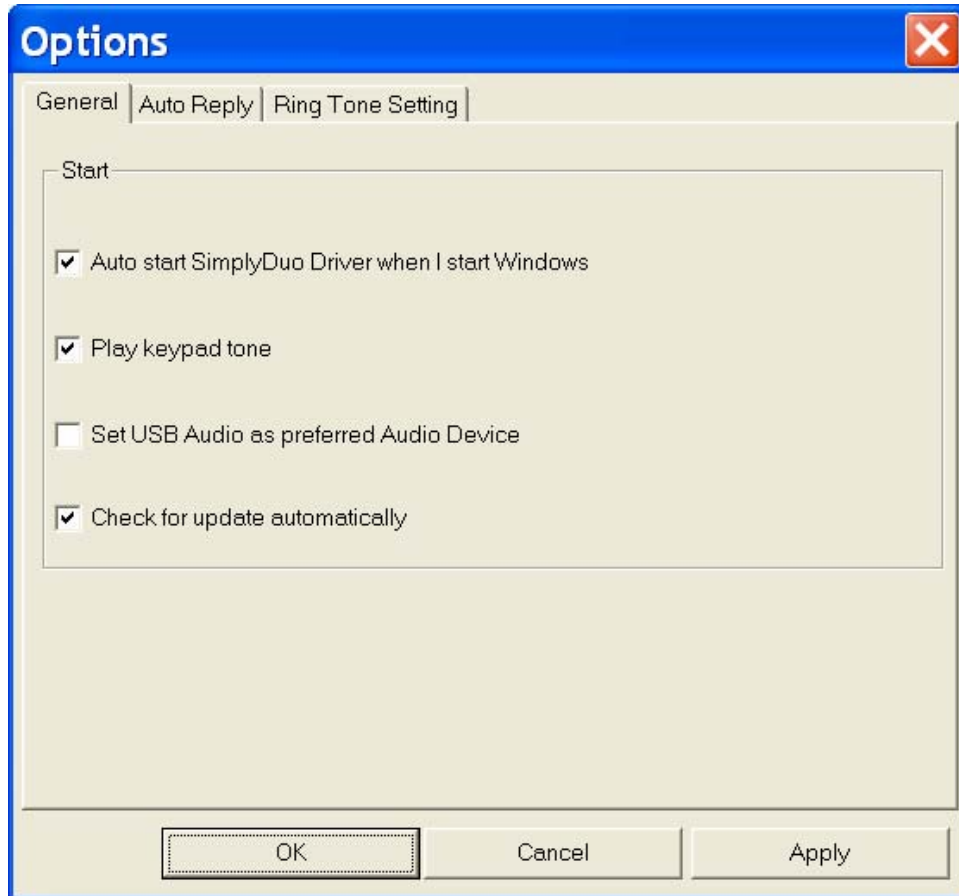


# The Call Functions



## Make a VoIP call

There are two ways to make a VoIP call.

### 1. Use the hands-free function to make a VoIP call.


- ① Press  to activate Skype window
- ② Use your mouse wheel to scroll up/down the VoIP contactlist to select the contact.
- ③ Click on the “Call” button on Skype window to make the call.

### 2. Use the phone keypad to make a VoIP call


- ① Open the mouse phone
- ② Use  on your mouse to scroll up/down to select the contact.
- ③ Press  to make the call.

#### Note:


Or you can use Speed-dial number to make calls.

- ① Open the mouse phone
- ② Dial the Speed-dial number and press  to make the call.

#### Example:

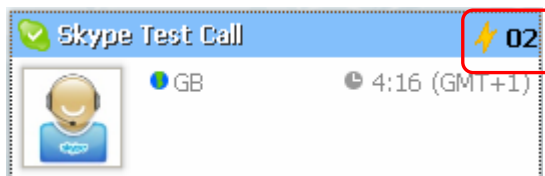




Supposed you want to make calls to this Skype contact. Please dial:



“02” + 

**Note:** For how to assign Speed Dial for your contacts, please refer to “**FAQ**” Q5 in this manual.

## Redial a VoIP call

Press  to activate the redial contact and press  or  to make the call.


## Make a SkypeOut call

- ① Open the mouse and press  + “country code” + “city code” + “phone number”.
- ② Press  to make the call.

Examples:

(Here we use the country code "1" for calling USA): + 1 555 1234567

**Note:** For more detailed usages of making a SkypeOut call, please visit Skype's official website: <http://www.skype.com>.

If you input a wrong number, please press  to clear it.

## Receive a VoIP call

There are two ways to receive a VoIP call:


1. Use the hands-free function: Directly press the button  .
2. Open the mouse or press  to receive calls.


## End a call

Close the Phone, or Press  or   to end a call.

# Other Functions




## Select a Chord Music Ring Tone

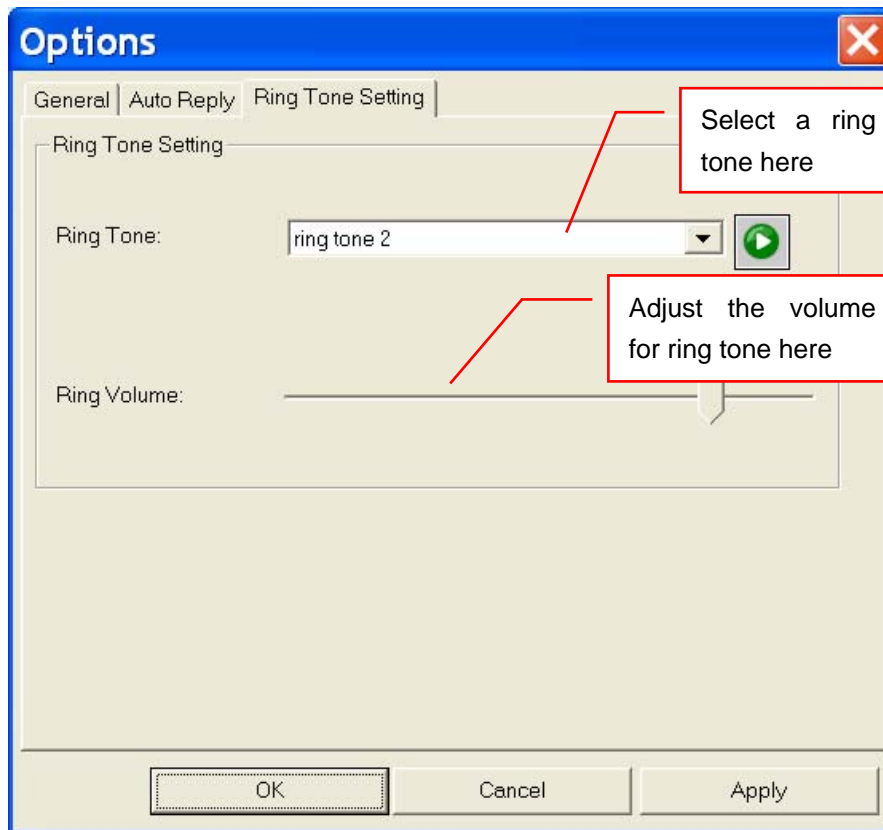
To select your favorite chord music ring tone, please right click the tray icon , choose "Options" and go to "Ring Tone Setting" panel.






## Check Call History and Voice Mail

① Press  (Menu Key)

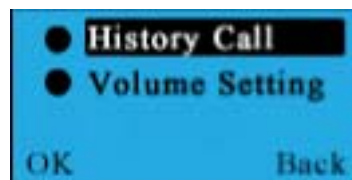② Use   to choose Call History and press  (OK)







③ Use   to choose Incoming/Outgoing Calls, Missed Call or Voice Mail, and press  (OK)






## Adjust Volume for Speaker

The operation for adjusting volume for speaker alters according to the following two situations.


When the Mouse is	Picture	Operation
Opened		<b>Scroll the mouse wheel</b> and you can see the volume status icon  in the LCD screen.
Closed		Press  .

# FAQ

**Q1: Why did I see the grey icon  rather than  in the taskbar? What's wrong with the driver software?**


▶ If you see the icon ,

1) please check whether there is skype running at the moment. If not so, please run at least one;


2) If you have run Skype, please check whether you can see the icon  in the Skype Windows.




But if you cannot see this icon, please follow the steps:

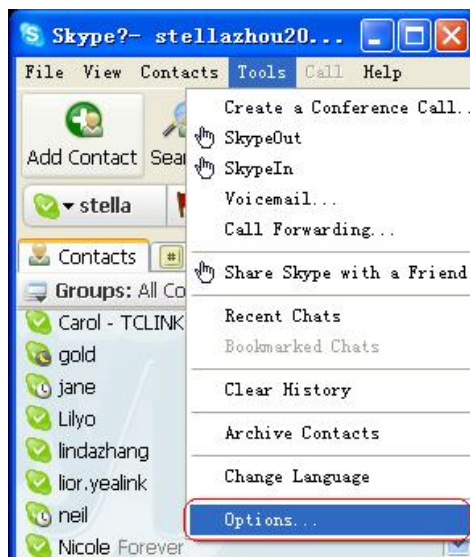


**Step1: "Tools" —"Options".**

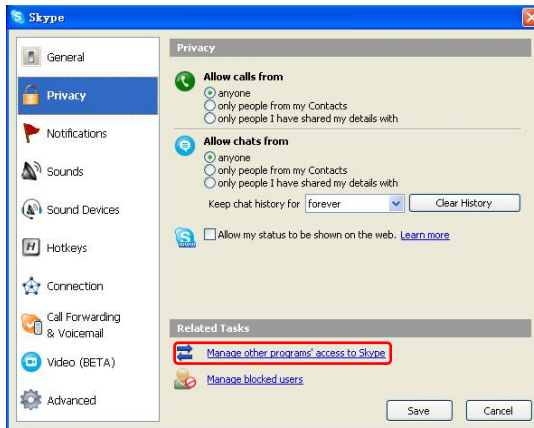

**Step 2: “Privacy”--“Related Task: Manage other program’s access to Skype”.**

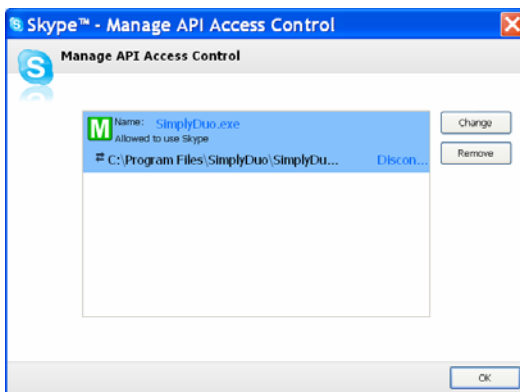


**Step 3: Choose “Change”**

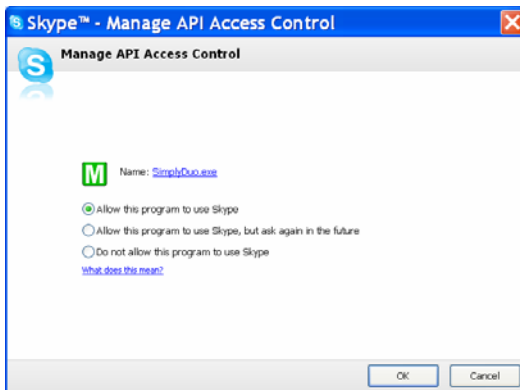

**Step 4: Choose “allow this program to use Skype”**

**Q2: After turning on the computer, I see the red icon . Why?**


- ▶ When you see the red icon , please go to your PC's **Device Manager** (“**Start**”—“**Setting**”—“**Control Panel**”—“**System**”—“**Hardware**”—“**Device Manager**”) to find whether the following four devices are in a normal state.

**“USB Human Interface Device”**

**“USB Audio Device”**

**“USB Composite Device”**


**“HID-compliant mouse”**

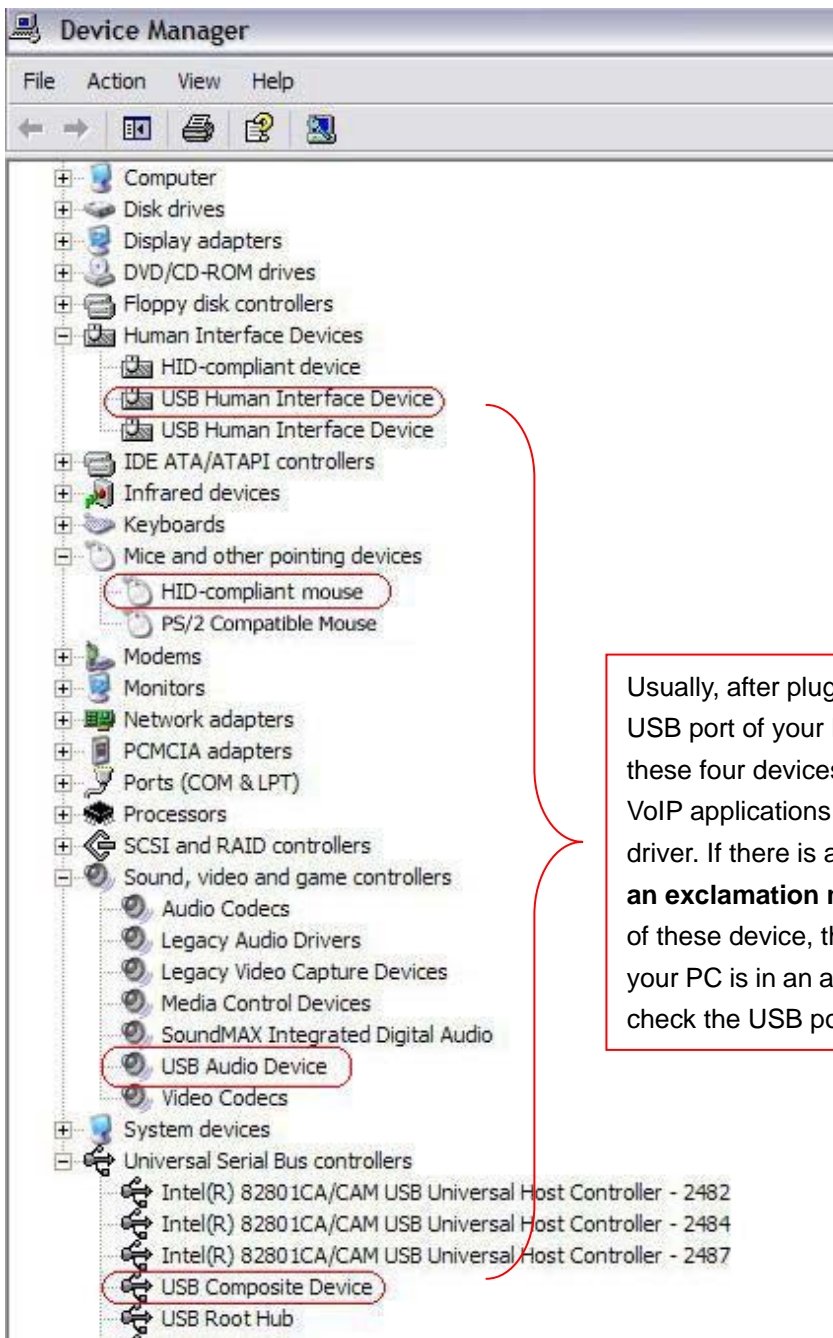


Usually, after plugging the mouse in the USB port of your PC, you can find these four devices when you run the VoIP applications and Mouse Phone driver. If there is a **question mark** or **an exclamation mark** before any one of these device, then the USB port of your PC is in an abnormal state. Please check the USB port of your PC.

**Q3: When I was answering a call, the Hi-Fi speaker continues playing music. It was quite annoying. What can I do?**

► You can tackle your problem in the Skype panel.

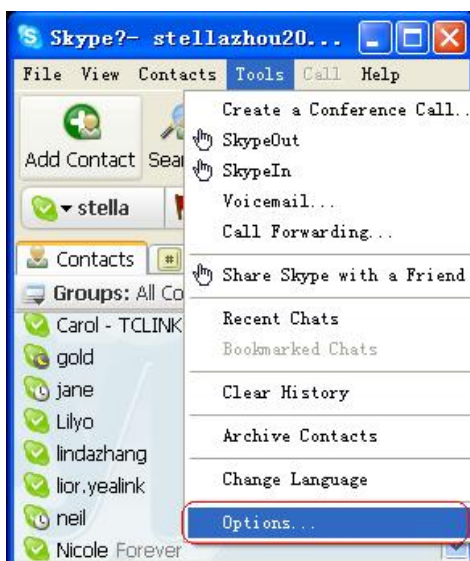


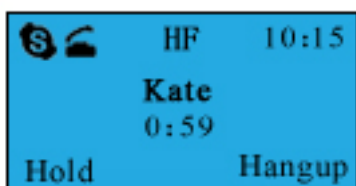
**Step1: “Tools” —“Options”.**

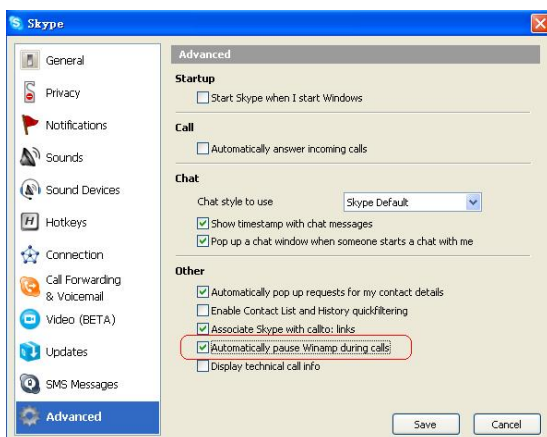

**Step2: “Advanced” —Check before “Automatically pause Winamp during calls” and click “Save”**


**Q4: If I had opened my mouse to receive the call, what should I do when I want to close the mouse to use the hands-free function and continue the call with my VoIP friends?**

► During a Skype call you can press the side button  to switch to the hands-free mode. When you see “HF” on the top-middle line of the following LCD screen, you can close your mouse and enjoy the hands-free function.




**Q5: How to assign a Speed-dial number for my contact?**

► You can assign Speed Dial number for the contacts directly on the related VoIP application's panel. Here we take Skype for example.

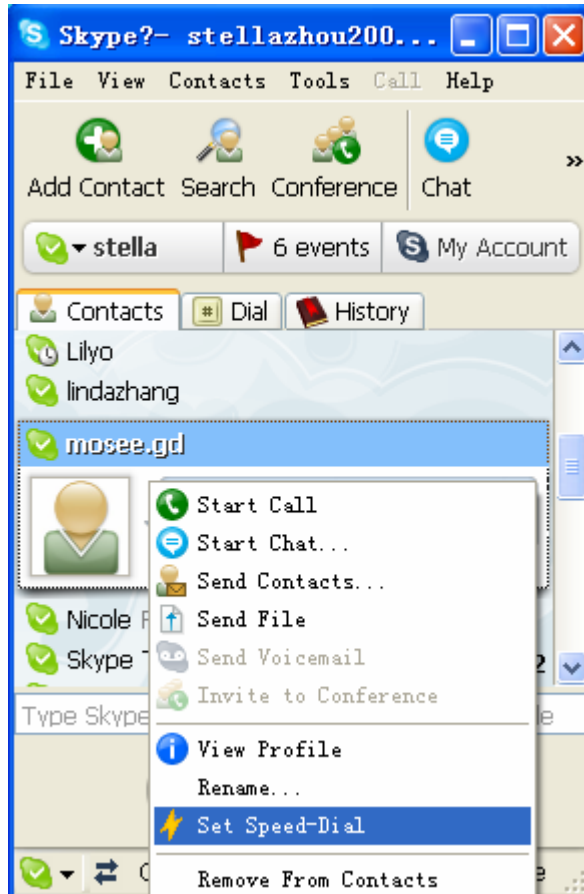

Right click on the selected Skype contact and choose "Set Speed-Dial"

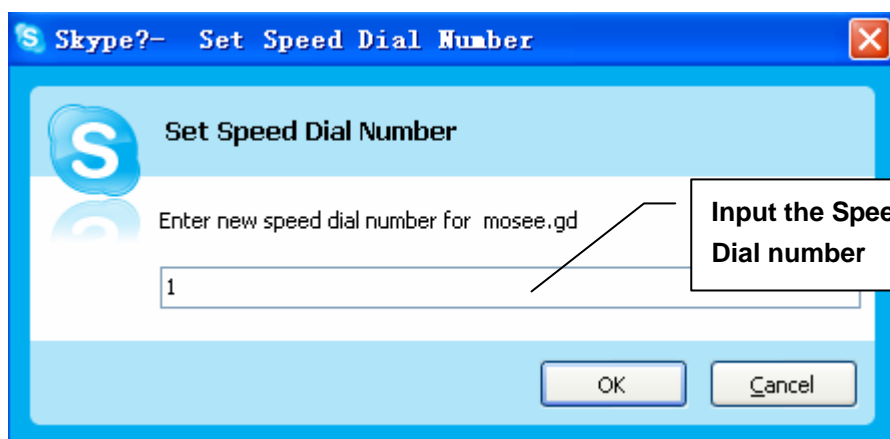

Now you can use the Speed Dial number to make Skype calls.